


Treillis Soudé – Type FNC

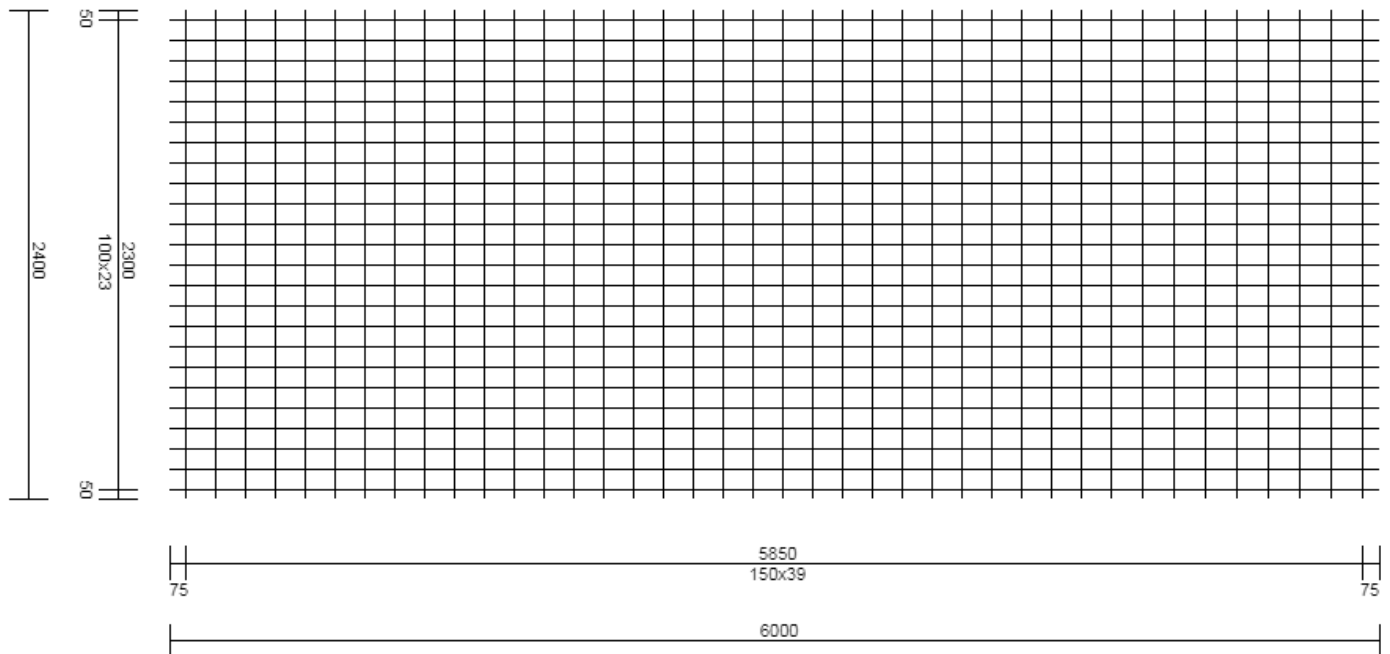

SPECIFICATION LNEC E 458-2011 - TYPE D'ACIER A500ER											
Réf.	Diamètres		Espacements		Nombre de Fils		Section par Mètre		Panneaux par Fardeau	m ² par Fardeau	m ² par Rouleau *
	Long. (mm)	Transv. (mm)	Long. (mm)	Transv. (mm)	Long.	Transv.	Long. (cm ² /m)	Transv. (cm ² /m)			
FNC 50	5.00	5.00	100	150	24	40	1.96	1.31	40	576	96
FNC 60/5	6.00	5.00	100	150	24	40	2.83	1.31	40	576	-
FNC 70/5.5	7.00	5.50	100	150	24	40	3.85	1.58	28	403.2	-
FNC 70/6	7.00	6.00	100	150	24	40	3.85	1.88	28	403.2	-
FNC 80/6.5	8.00	6.50	100	150	24	40	5.03	2.21	24	345.6	-
FNC 80/7	8.00	7.00	100	150	24	40	5.03	2.57	24	345.6	-
FNC 90/7	9.00	7.00	100	150	24	40	6.36	2.57	18	259.2	-
FNC 90/8	9.00	8.00	100	150	24	40	6.36	3.35	18	259.2	-
FNC 100/8	10.00	8.00	100	150	24	40	7.85	3.35	16	230.4	-
FNC 100/9	10.00	9.00	100	150	24	40	7.85	4.24	14	201.6	-
FNC 110/9	11.00	9.00	100	150	24	40	9.50	4.24	12	172.8	-
FNC 110/10	11.00	10.00	100	150	24	40	9.50	5.24	10	144	-
FNC 120/10	12.00	10.00	100	150	24	40	11.31	5.24	10	144	-
FNC 120/11	12.00	11.00	100	150	24	40	11.31	6.34	10	144	-

* treillis en rouleau de 50x2.40m ou 40x2.40m

Autres spécifications sur demande.