


Geschweißte Maschen – Typ FNC

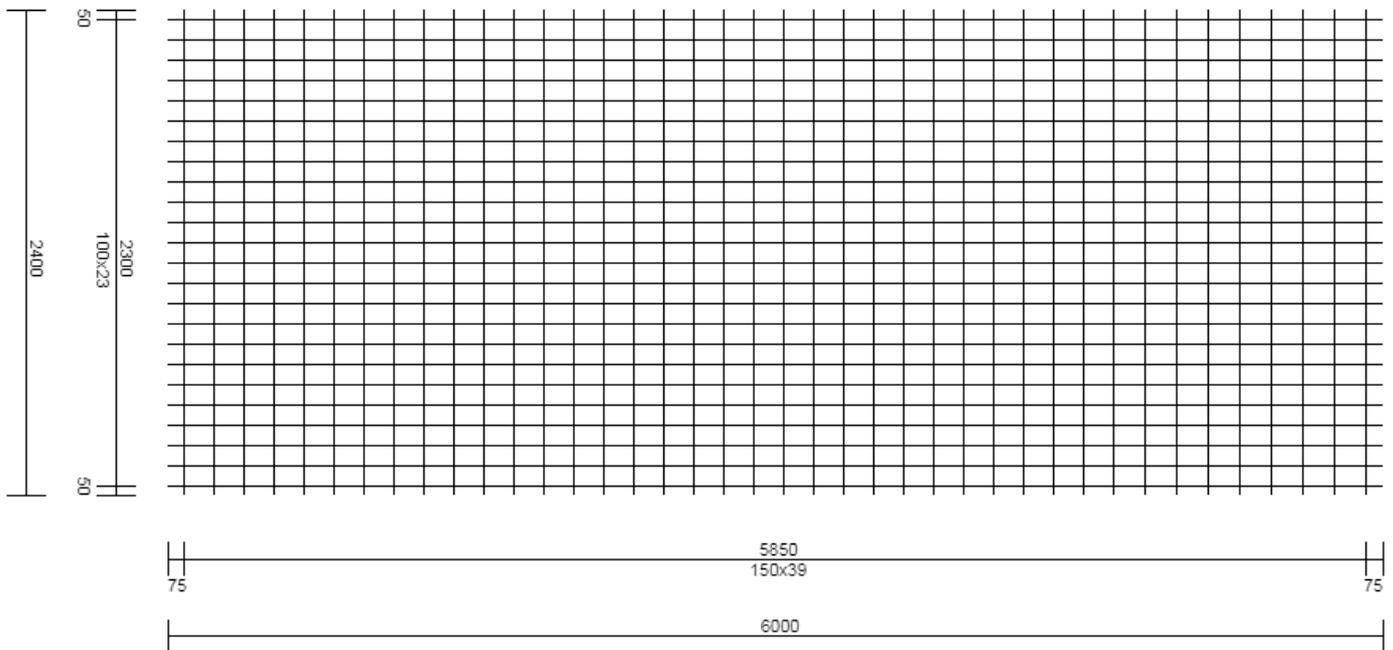

| SPEZIFIKATIONEN LNEC E 458-2011 – STAHL TYP A500ER | | | | | | | | | | | | |
|--|-------------|-----------|------------|-----------|-------------------|------|----------------------------|---------------------------|--------------------|----------------------------|----------------------------|--|
| Ref. | Durchmesser | | Abstand | | Anzahl der Drähte | | Schnitt pro Meter | | Matten pro Packung | m ² pro Packung | m ² pro Rolle * | |
| | Längs (mm) | Quer (mm) | Längs (mm) | Quer (mm) | Längs | Quer | Längs (cm ² /m) | Quer (cm ² /m) | | | | |
| FNC 50 | 5.00 | 5.00 | 100 | 150 | 24 | 40 | 1.96 | 1.31 | 40 | 576 | 96 | |
| FNC 60/5 | 6.00 | 5.00 | 100 | 150 | 24 | 40 | 2.83 | 1.31 | 40 | 576 | - | |
| FNC 70/5.5 | 7.00 | 5.50 | 100 | 150 | 24 | 40 | 3.85 | 1.58 | 28 | 403.2 | - | |
| FNC 70/6 | 7.00 | 6.00 | 100 | 150 | 24 | 40 | 3.85 | 1.88 | 28 | 403.2 | - | |
| FNC 80/6.5 | 8.00 | 6.50 | 100 | 150 | 24 | 40 | 5.03 | 2.21 | 24 | 345.6 | - | |
| FNC 80/7 | 8.00 | 7.00 | 100 | 150 | 24 | 40 | 5.03 | 2.57 | 24 | 345.6 | - | |
| FNC 90/7 | 9.00 | 7.00 | 100 | 150 | 24 | 40 | 6.36 | 2.57 | 18 | 259.2 | - | |
| FNC 90/8 | 9.00 | 8.00 | 100 | 150 | 24 | 40 | 6.36 | 3.35 | 18 | 259.2 | - | |
| FNC 100/8 | 10.00 | 8.00 | 100 | 150 | 24 | 40 | 7.85 | 3.35 | 16 | 230.4 | - | |
| FNC 100/9 | 10.00 | 9.00 | 100 | 150 | 24 | 40 | 7.85 | 4.24 | 14 | 201.6 | - | |
| FNC 110/9 | 11.00 | 9.00 | 100 | 150 | 24 | 40 | 9.50 | 4.24 | 12 | 172.8 | - | |
| FNC 110/10 | 11.00 | 10.00 | 100 | 150 | 24 | 40 | 9.50 | 5.24 | 10 | 144 | - | |
| FNC 120/10 | 12.00 | 10.00 | 100 | 150 | 24 | 40 | 11.31 | 5.24 | 10 | 144 | - | |
| FNC 120/11 | 12.00 | 11.00 | 100 | 150 | 24 | 40 | 11.31 | 6.34 | 10 | 144 | - | |

* Netzwerk Rolle 50x2.40m oder 40x2.40m

Sonstige Spezifikationen auf Anfrage.